User Manual

(Based on Firmware v3.0.4)

MED500X

High Definition Multimedia Player

INDEX

page 1	Index
page 2	Introduction
page 3	General Overview
page 4	Installing a Hard Drive
page 5	Connections
page 6	Connections continued
page 7	TV Output Settings
page 8	Formatting the Hard Drive
page 9	Remote Functionality
page10	Home Network Samba Server
page11	Wired Network Connection and Setup
page12	Wireless Network Setup / Firmware Update
page13	Media Library
page14	Media Library Music Player
page15	Cover Art Preview
page16	Play Folder / Play from Cover Art / Watched Indicator
page17	Folder / System Lock
page18	File / Folder Jump to
page19	Playlists
page20	Time Bar Jump
page21	Time Bar FF/RW - Goto Screen
page22	Screen Calibration
page23	Subtitles
page24	File Manager
page25	File Manager -Detail
page26	File Manager - Detail Continued
page27	Internet Radio
page28	NFS (Network File System)
page29	Icon Table

Thank you for purchasing the Mede8er Multimedia Player.

The MED500X is the latest generation multimedia player specially developed by Sanji for today's demanding media enthusiast. The Mede8er has been designed for good solid media playback from a hard drive, USB device, SD Card, Internet or Local Network source. The User Interface is neat and intuitive without being complicated. Sanji has more than achieved their design goals by offering a media player that supports most of the popular media formats at a very affordable price.

Please check the Mede8er forum for the latest user guide. www.mede8erforum.com

Warranty

Mede8er products carry a 24 month from date of purchase warranty. In the event of warranty service please provide proof of purchase. Return your product to the store that it was purchased from or return it directly to Sanji Electronics (Pty) Ltd 106, 16th Rd Midrand, Gauteng, South Africa.

Warranty does not cover damage by

a) Lightning or over voltage
b) Water damage or liquid spill
c) Misuse or abuse
d) User tampering
e) Using non Mede8er approved Firmware

Sanji Electronics is not responsible for any loss of data irrespective of the cause.

Important Safety Instructions

- Read these instructions for all components before using this product.
- Do not use this apparatus near water or moisture. Do not use this product near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, near a swimming pool, or anywhere else that water or moisture are present.
- Clean only with a soft dry cloth and as directed by the manufacturer. Unplug this product from the wall outlet before cleaning.
- Do not block any ventilation openings. Install in accordance with the manufacturer instructions. To ensure reliable operation of the product and to protect it from overheating, put the product in a position and location that will not interfere with its proper ventilation. For example, do not place the product on a bed, sofa, or similar surface that may block the ventilation openings. Do not put it in a built-in system, such as a bookcase or a cabinet that may keep air from flowing through its ventilation openings.
- Do not install near any heat sources, such as radiators, heat registers, stoves or other apparatus that produce heat.
- Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments or accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time to prevent damage to this product.

Refer all servicing to qualified service personnel

GENERAL OVERVIEW

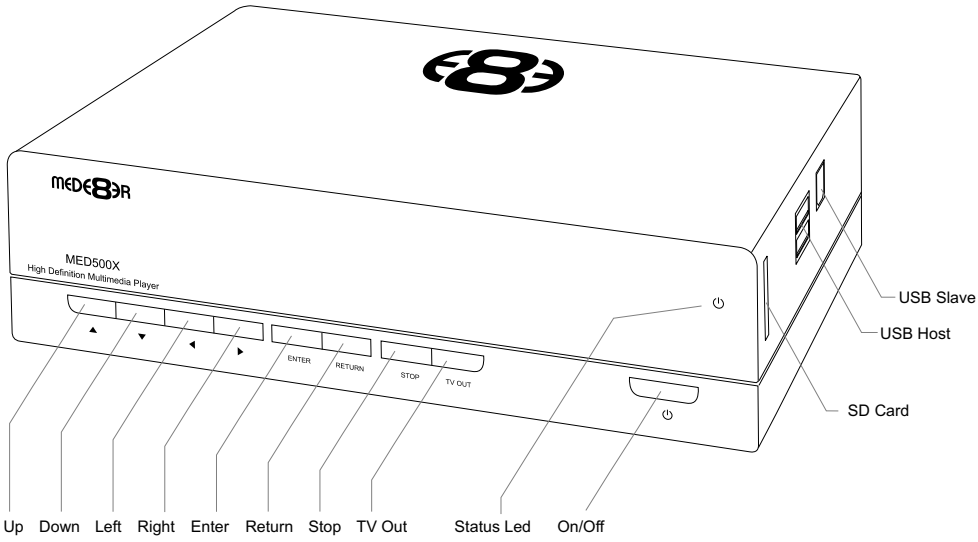

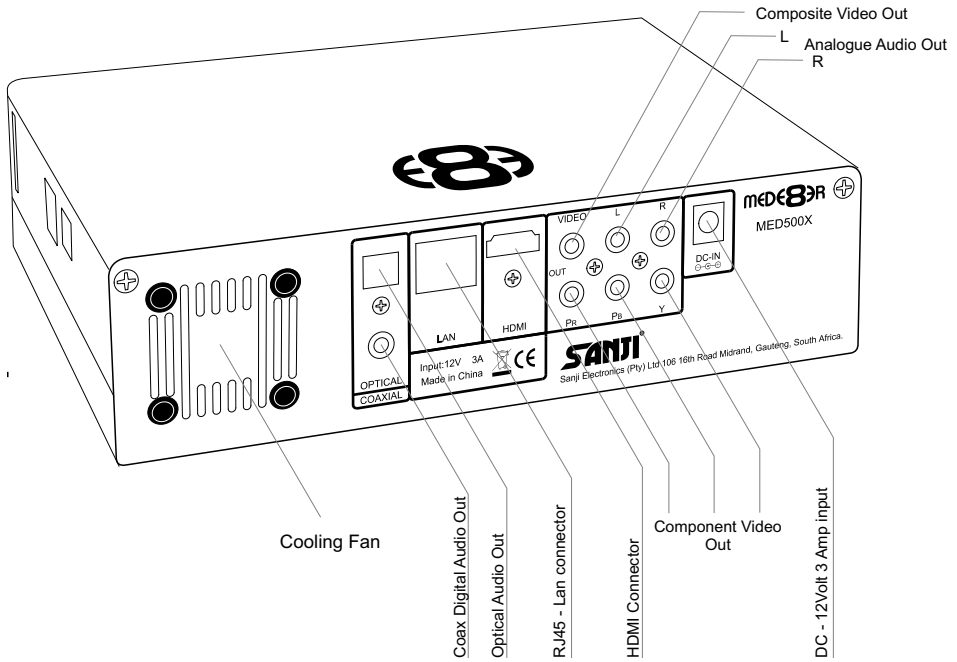

INSTALLING A HARD DRIVE

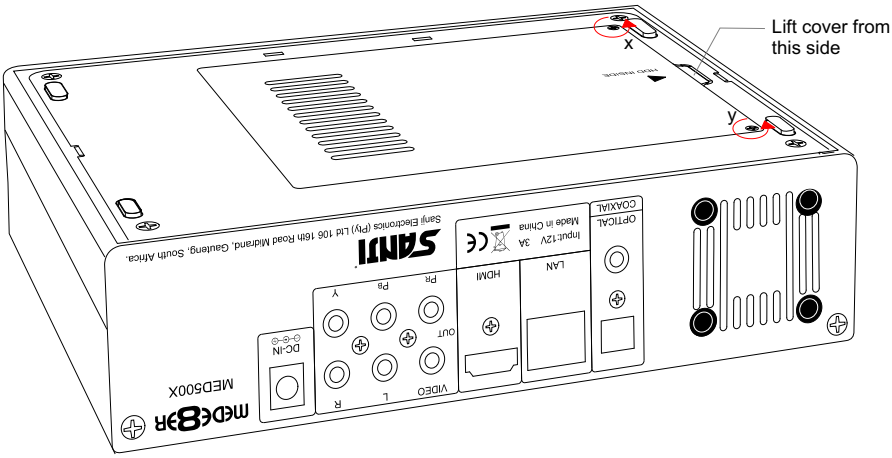

a)

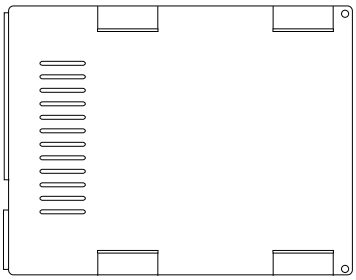

b)

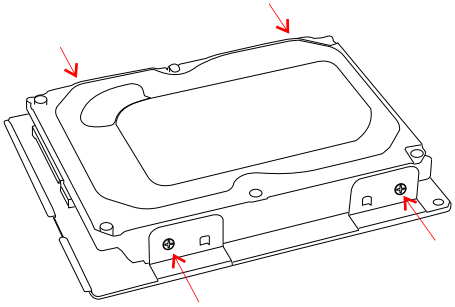

c)

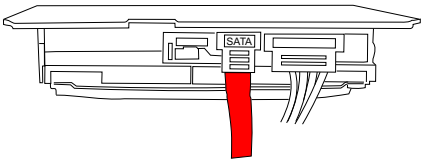

d)

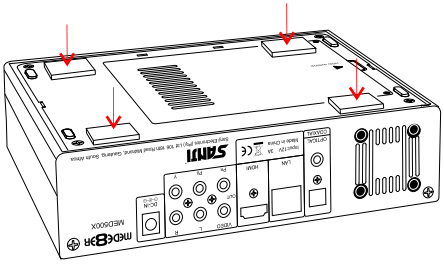

Make sure that the DC cable is unplugged. Turn the Mede8er upside down and unscrew the hard drive cover screws x and y. Lift the hard drive cover and remove it, place it on a flat surface with the mounting tabs facing upright. Fit a compatible SATA hard drive into place with the label facing upwards and the connectors facing the side with the air vents. Secure the hard drive with the four screws provided.

Connect the hard drive power connector and the red SATA data connector from the player to the hard drive diagram c. Re fit the hard drive cover into the Mede8er body and tighten the two securing screws x and y.

To reduce hard drive vibration noise you can use the supplied Neoprene pads. Just peel of the adhesive side and stick onto the base as indicated in diagram d.

CONNECTIONS

Analogue Audio and Composite Video connection to TV.

Composite Video offers the most basic picture quality connection and should only be used if your TV does not have a HDMI or Component input. Use RCA analogue audio outputs in the absence of HDMI or Digital Audio inputs on your TV or Home Theatre system. RCA analogue outputs will output a downmix from mutli-channel to stereo.

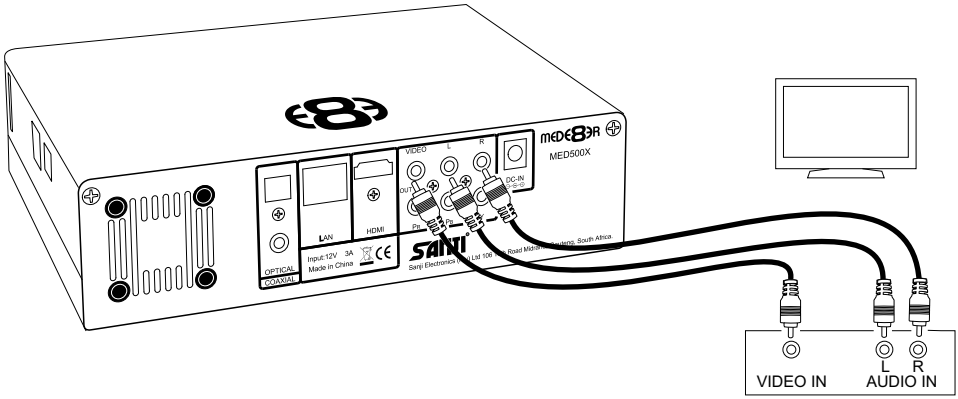

HDMI - RJ45 Network - Coax Digital - Toslink Connection to a TV or Amplifier

For digital audio connection to your Home Theatre System you can either use the TOSLINK Optical or the Coax Digital output. The MED500X supports both Passthrough and Downmix for both Dolby Digital and DTS signals. If you want your Home Theatre Amplifier to decode the surround sound stream you should use either Digital Audio output and set the Audio Output to SPDIF RAW in the Setup menu.

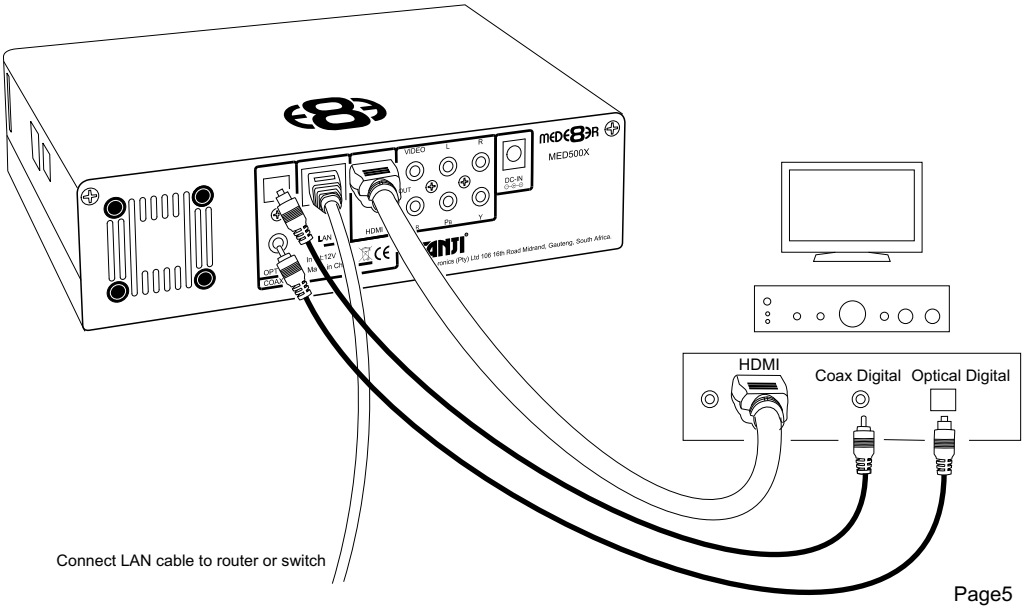

Component Video Connection to Amp or TV

Component Video offers the next best picture quality to HDMI so if your system does not have a HDMI input we suggest you use the Component Video Connection.

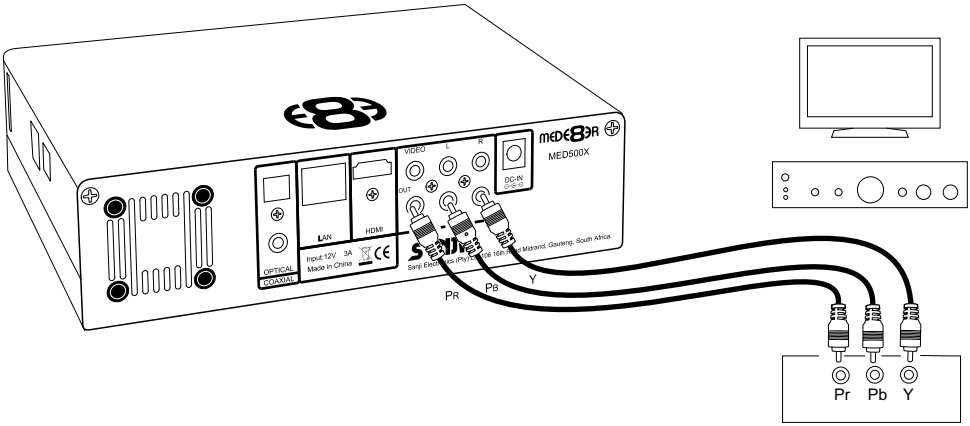

Power up and Standby

Plug the AC/DC adapter into the mains outlet and plug the DC Jack into the DC IN at the rear of the MED500X. DO NOT USE ANY AC/DC ADAPTER AND ONLY USE THE ONE SUPPLIED otherwise you may cause damage to the unit. Press the On/ Off button on the Mede8ers front panel and front facia LED will turn on Blue. You can put your Mede8er into standby by pressing the On/ Off button on the remote. When in standby the front facia LED will turn Red.

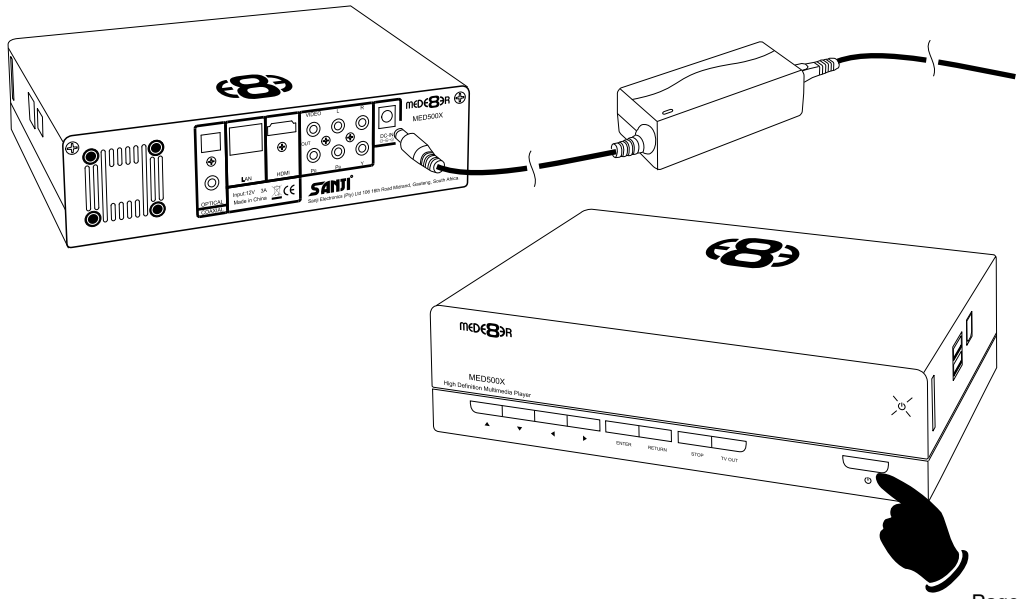

TV OUTPUT SETTINGS

Connect the Mede8er to your TV by one of the connection options as shown on page 5 & 6 and change the input option on your TV to match the option you selected. If you do not get to see the Mede8er GUI on your TV you will need to toggle the Mede8er TV output until you get a picture.

TV SYS Toggle Procedure

The Mede8er has three video output options ie Composite Video (yellow RCA connectors, Component Video (Red - Green- Blue connectors) and HDMI. Each output option also offers different screen resolution settings and these will need to be adjusted to match the type of TV used.

To change the Video Output on the Mede8er just press the TV SYS button on the remote and it will change the Video Output to the next available output option. If after pressing the TV SYS button you still do not get a picture then after a short pause press the TV SYS again until you see the Mede8er GUI on your TV. Keep repeating this procedure until you see a picture on your TV.

Once you see the Mede8er GUI on your TV then you must enter the Video Setup mode and adjust the Video settings to match the screen size resolution of your TV.

AUDIO SETTINGS

HDMI Downmix (2 channel)
Use this setting if you are connecting the Mede8er directly to the HDMI input on your TV. The sound will be downmixed to 2 channel stereo.

HDMI Passthrough
Use this setting if you are connecting to the HDMI input of a Home Theatre Amplifier. The audio will be passed through as Bitstream or LPCM and the amplifier will do the multichannel decoding.

SPDIF Downmix (2 channel)
Use this setting to connect to a Amplifier via Toslink optical cable or Co-Axial Digital RCA cable. The sound will be downmixed to 2 channel stereo.

SPDIF Passthrough
Use this setting to connect to amplifier via Toslink optical cable or Co-Axial Digital RCA cable. The sound will be passed through as Bitstream or LPCM and the amplifier will do the multichannel decoding.

FORMATTING THE HARD DRIVE

The MED500X has a built in Hard Drive format feature that formats the hard drive with a main NTFS partition and other small internal partitions for propriety use.

The Hard Drive should be formatted in the Mede8er MED500X to ensure full functionality. A pre formatted Hard Drive can be used but you may not be able to use all the internal features of the MED500X.

To Format the internal Hard Drive select SETUP menu and then HDD Format. The Hard Drive format function can be protected by the built in “Pin Code Lock” function. To enable Hard Drive Format protection just enable “Pin Protection” option in the Setup menu.

Hard Disc Format
WARNING!!!
You are going to enter the hard disc format process.
All data will be lost after this process.
Please read the user manual to get more information!!
OK
Cancel

WARNING: FORMATTING THE HARD DRIVE WILL ERASE ALL DATA

USB CONNECTION TO PC

You can transfer files to and from the Mede8er via fast USB2.0 transfer. Use the included USB cable to connect the Mede8er MED500X to your PC. As soon as the USB cable from the Mede8er is connected to your PC the front Blue LED on the Mede8er will switch off and then on again. The Mede8er will now connect.The computer will automatically install the correct drivers and then you will be able to navigate the Mede8er like any normal external USB drive. **Note:** Some Computers may take up to a few minutes to install the correct USB drivers.

EXTERNAL USB DEVICE DRIVER NOT REQUIRED

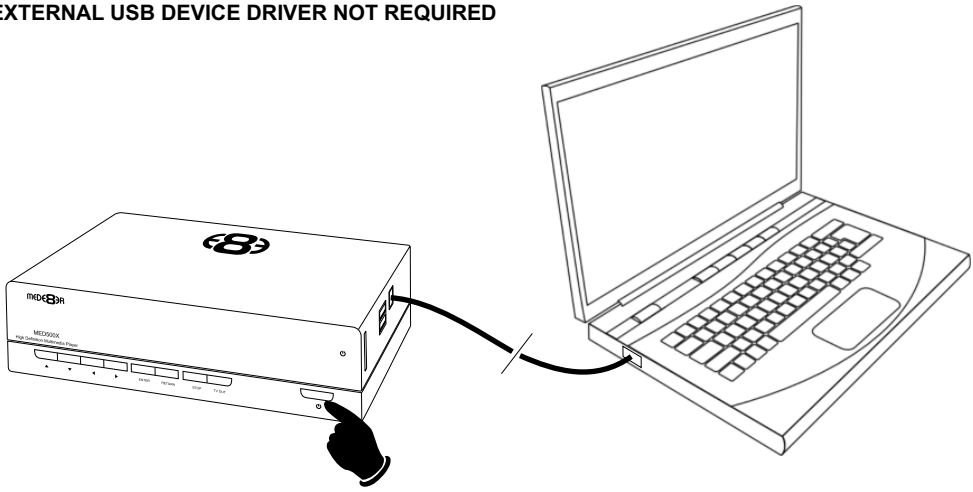

REMOTE FUNCTIONALITY

LED
On / Off
TV System
Repeat Shuffle
Rewind
Fast Forward
Home Page
*Navigation Left
DVD Menu / Menu
Slow / Zoom
Pause
Skip Forward/Back
Select
Confirm

Audio Mute
Info Screen
Shortcuts - Media Library - File Copy - Music Playlist
Numbers
Goto
Volume Up/Down
Previous
Play Stop
Next
Navigation Up - Volume Up in Video File (not DVD)
Return
Navigation Enter - Pause / Play in Video File (not DVD)
Navigation Right - FF in Video File (not DVD)
Navigation Down - Volume Down in Video File (not DVD)
Setup Menu
Repeat A - B / Zoom
Angle DVD
Picture Zoom
Subtitle
Audio Selection

* Rewind in Video File (not DVD)

Navigation Buttons Additional Functionality

To assist ease of use operation - The Mede8er remote has been designed to be ergonomic and simple to use. While watching your Videos you can intuitively navigate and change certain function without the need to continually look at the remote control.

During Video Playback (excluding DVD files) you can use the navigation buttons for operational functions like Fast Forward, Rewind, Pause, Stop, Volume Up and Volume Down.

Volume Up
Fast Rewind
Fast Forward
Pause / Play
Volume Down

HOME NETWORK SAMBA SERVER

The Mede8er has NAS (Network Attached Storage) functionality built in. And although it is limited in transfer speed compared to standalone NAS servers it performs very well if speed is not your major requirement. You can also use the MED500X as a Media Server and stream content to other Mede8er's on your home network.

The Samba function is enabled or disabled in the System menu under Network. Should the Samba stop working for any reason we suggest you re-boot the Mede8er ie Disconnect the DC Jack at the rear and re connect and press the on/off button on the front panel.

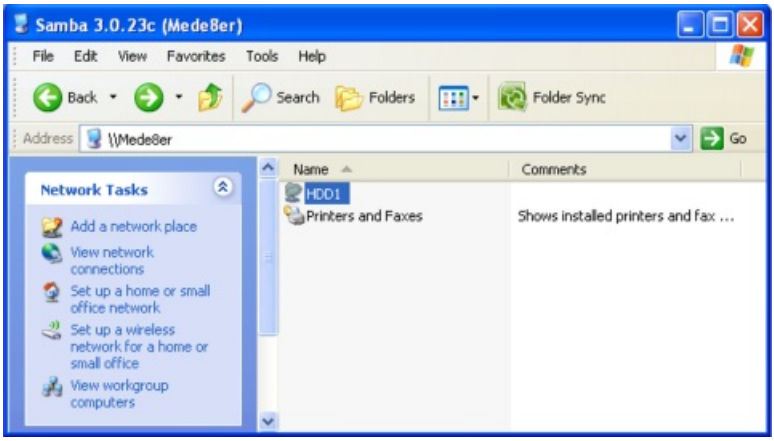

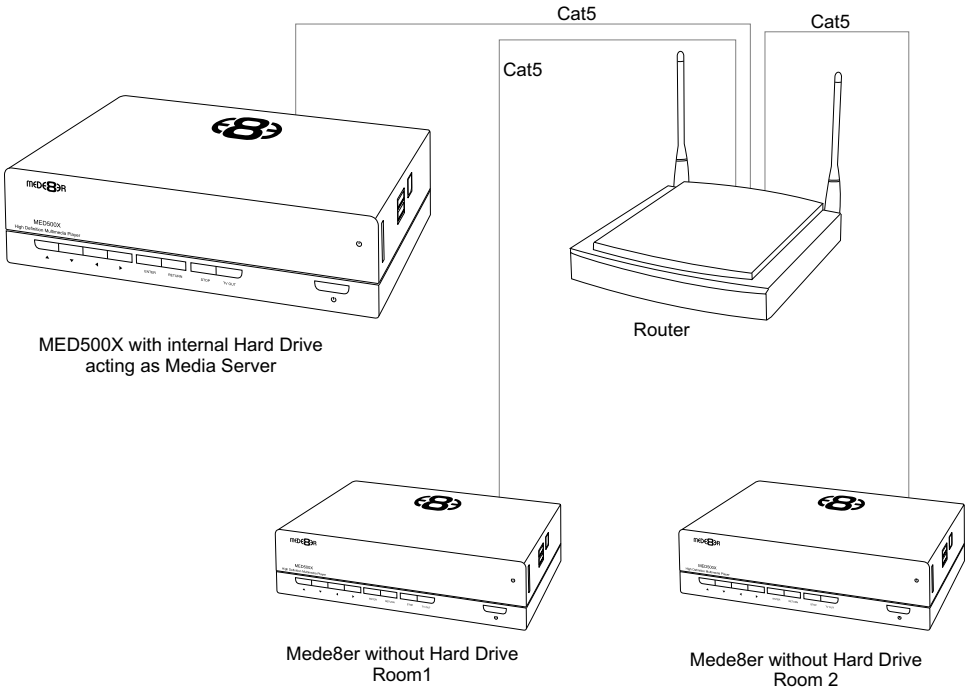

WIRED NETWORK CONNECTION AND SETUP

The Mede8er MED500X can be connected to your local network by means of a RJ45 CAT5 cable. The Mede8er is supplied standard with a UPnP facility and a Samba Client that allows connection to your local area network via a router or switch. You can share media files from your PC and stream media content to the Mede8er and you can use the Mede8er as a Media Server to stream media content to other Mede8er's on your network.

Press the "setup" button on the Mede8er Remote or select "setup" tab on the home page. Select "Network" option in the setup window and press "OK" to confirm. Network configuration allows for either automatic or manual IP setup.

Follow the on-screen instructions to complete the network setup.
If you connect to a wired Ethernet network using DHCP, Mede8er automatically detects your network. Alternately you may have to enter your IP address, subnet mask, router, and DNS addresses manually.

DHCP IP (AUTO)
Choose this option if you want your router to assign a dynamic IP address to Mede8er. This option is easy to use and recommended for normal users.

FIX IP (MANUAL)
This option allows you to assign a static IP address to Mede8er. This option requires modifying network settings of the Mede8er and is recommended for advanced users. To set a Static IP for your Mede8er, enter the information IP Address, Subnet Mast and Gateway and DNS Server Address as relevant to your router as in the screen below.

The IP address, Gateway information shown below is for reference purposes only. Do NOT copy these

DHCP IP Auto

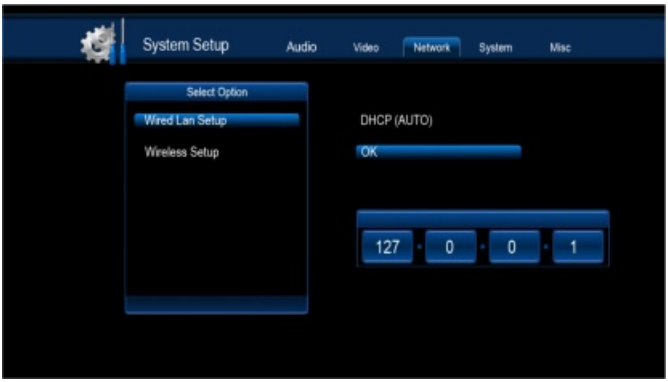

Fixed IP Manual

WIRELESS NETWORK SETUP (basic)

The Mede8er MED500X is only compatible with the Mede8er Wireless Dongle 802.11n
(Other brands will not work)
Refer to User Instructions supplied with the Mede8er dongle for detailed wireless connection setup.

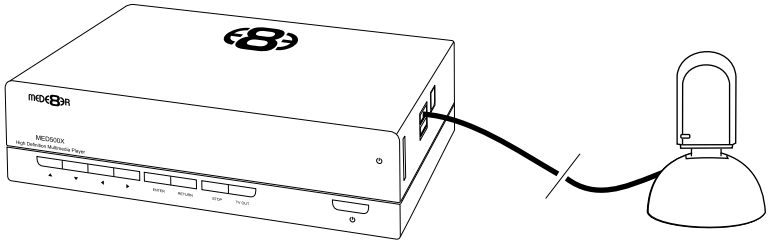

WIRELESS NETWORK CONNECTION

Plug the MED10WF into the USB extension base that was supplied with your Mede8er. Plug the USB cable into one of the USB host ports on the side of the Mede8er. Extend the cable and try to place the base in a position that is away from any metal object that could effect the RF signal strength. The best placement for the dongle will depend on your particular environment. In order to get the best placement you may need to extend the length with an additional USB extension cable (not supplied).

Note: The draft N standard prohibits using High Throughput with WEP or WPA2-PSK as the unicast cipher, and your data rate will drop to 54 Mbps (802.11g) which is normal. Please try other encryption methods (WPA-PSK), or choose to configure an unsecured profile.

The operating distance or range of your wireless connection can vary significantly based on the physical placement of the Router and the WiFi Dongle.

For best results, place your Router:

* Near the center of the area in which your Mede8er will operate,
* In an elevated location such as a high shelf,
* Away from potential sources of interference, such as PCs, microwaves, and cordless phones,
* With the Antenna screwed in tight and in the upright position,
* Away from large metal surfaces.

FIRMWARE UPDATE

Power Up and hold on/off button for 10 seconds

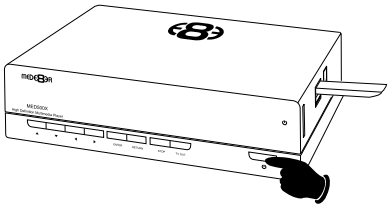

Download the latest Mede8er Firmware from www.mede8erforum.com.

UnZIP or UnRAR the file and you will find one file named install.img. Copy this file to the root directory of a Flash Drive. Plug the flash drive into the Mede8er. Disconnect the power jack at the rear of the Mede8er then plug it back in - Now press the on/off button and hold it pressed for 10 seconds and then release.

After approximately 15 seconds the LED on the Mede8er with flash red-blue and you will get a progress bar on your TV display (some TV's will not display this) wait until the Mede8er re boots itself +- 60 sec. You Mede8er is now be updated.

DO NOT REMOVE POWER DURING THE EMERGENCY RECOVERY PROCEDURE.

MEDIA LIBRARY

Select Media Library from the home page and a new screen will load then select the source option you require. You can choose between USB device, SD Card, Local HDD, USB DVD, Network, UPnP, NFS and Playlist.

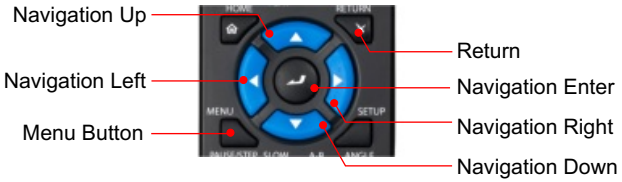

Once you have selected your source input you can browse to the folder or file you want to view by using the navigation buttons on the remote control. The top tabs filter the files by All, Music, Photo and Movies. All files and folders are displayed on the left hand side and a preview window is located on the right of the screen. When you play music files a music window will appear at the bottom left of the screen.

The Media Library offers additional functionality when the “menu” button on the remote is pressed. Select a file or folder and press the “menu” button and the menu dialogue will appear and display all the available options.

	Return
a b	Rename
	Delete
	Mark as watched
	Remove watched indicator
	Lock Folder
	Unlock Folder

MEDIA LIBRARY - MUSIC PLAYER

Select any supported music file and the Music Player Screen will launch. If the music file has embedded information tags then these will be displayed on the right hand side in the preview window area.

OFF - Repeat and Shuffle off

Repeat Track - Repeat the current track

Repeat All - Repeat all tracks in the folder. Shuffle off

Shuffle - Shuffle all tracks in the current folder

COVER ART PREVIEW

Mede8er has the built in facility to preview cover art and will read folder.jpg and about.jpg inside a folder. All you need to do in order to use this very useful feature is to arrange your collection with each video, in its own folder. Place a JPEG picture together with each movie in the folder and you will be ready to go. You can easily download DVD cover art for your picture or you can use the free program like YAMJ to Mede8er to make your folder.jpg and about.jpg pictures that will contain additional content information such as Synopsis, Cover, Rating, Year, Actors etc etc

IMPORTANT: We recommend that you firstly set your screen size in the Setup menu before viewing in folder full screen cover art.

Navigate to a folder. The image will be displayed in the preview window.

To view the preview in full screen press the SLOW or A-B button.

Press the Nav Up/Down to browse by cover art

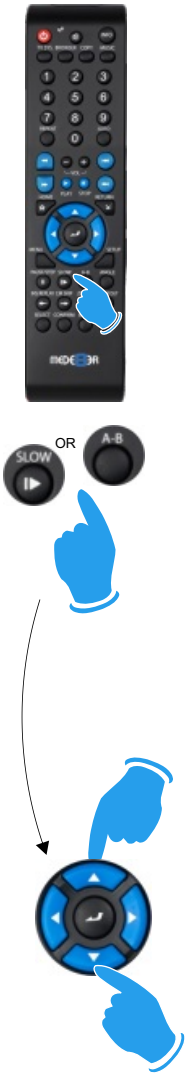

PLAY FOLDER

Mede8er allows you to play a video file within a folder without the need to open the folder. Just focus on the required folder and press the “Play” button. The first video file found in the folder will be played. The folder play will only work with video files.

PLAY VIDEO FROM COVER ART

With Mede8er you can play the video directly from the cover art. Zoom the about.jpg by pressing the “slow” or “A-B” button then press Play or Enter to play the video.

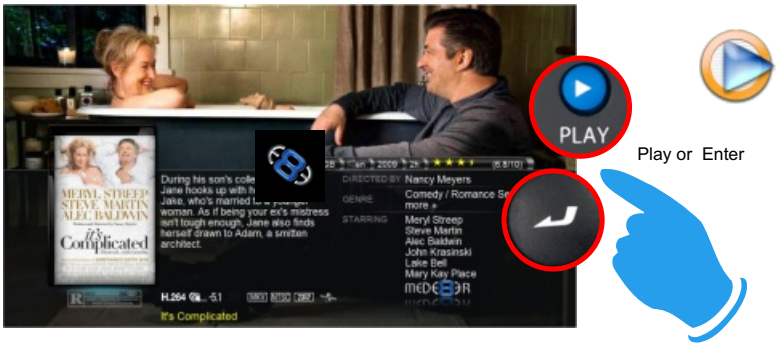

WATCHED INDICATOR

Mede8er is equipped with a watched video indicator feature. To enable this function go to Setup -- Misc -- Watched Indicator and switch it on. Mede8er will mark the Video file with a eye icon once more than 10% of a video has been watched. You can also mark a video as watched or clear the watched icon manually. To do this, focus on the file you require to change and press the Menu button. The Menu dialogue screen will be shown on screen and now you can mark the video as watched or remove the watched icon.

Watched Indicator

Mark as watched

Clear Watched

LOCK FACILITY

Mede8er has a built in Lock facility designed to restrict access to certain folders.

Lock facility functions

a. System access areas such as Hard Drive Format screen and File Manager. (Pin Protection)

b. User Folders (Folder Protection)

You can enable or disable these options in the Setup menu

CHANGE PIN CODE

The default 4 digit Pin Code is 0000.

To change the Pin Code go to Setup -- Misc -- Password -- You will be prompted to enter the existing pin code. For the first time you must enter the default factory pin ie 0000 then the Pin Code change screen will open. Now enter you new personal 4 digit code by pressing the numbers on your remote. Once you have entered the code press the “ENTER” button on the remote and the new code will be saved.

PIN PROTECTION

Enable Pin Protection to protect access to the Hard Drive Format area and the File Manager functionality. Once the Pin Protection is enabled you will be prompted to enter your personal 4 digit pin code when trying to gain access to these screens.

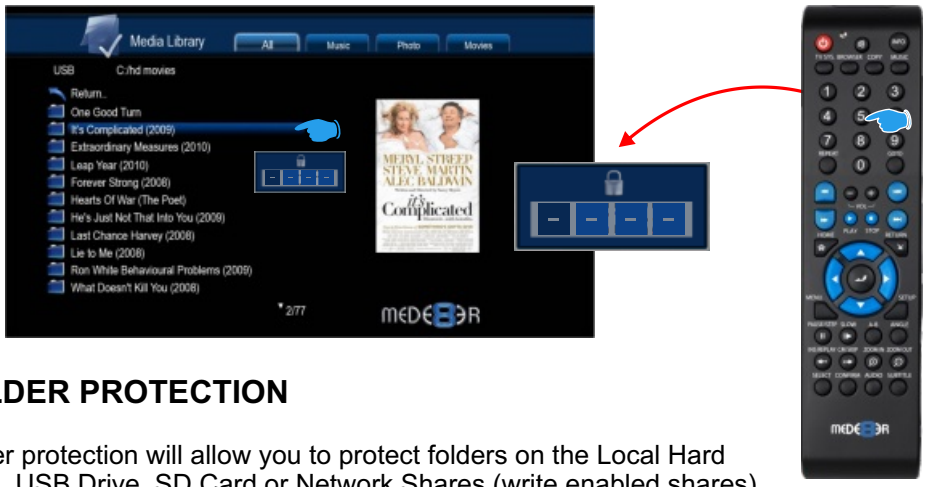

FOLDER PROTECTION

Folder protection will allow you to protect folders on the Local Hard Drive, USB Drive, SD Card or Network Shares (write enabled shares). To protect a folder focus on the folder and press the Menu button on the remote. Select the Lock icon and the folder will be locked. To unlock a folder focus on the folder and press the Menu button on the remote. Select the Unlock icon and you will be prompted to enter your Pin Code. After the correct code is entered the folder will be Unlocked

Lock Folder

Unlock Folder

RESET PIN CODE

To reset the Pin Code re-install the latest firmware and the Pin Code will default back to 0000

FILE OR FOLDER JUMP TO FACILITY

Mede8er has the built in jump facility that allows you to jump to a certain file or folder number on the Media Library screen. This facility is very useful for users that store many files or folders in a directory as it allows you to jump to any file or folder number quickly.

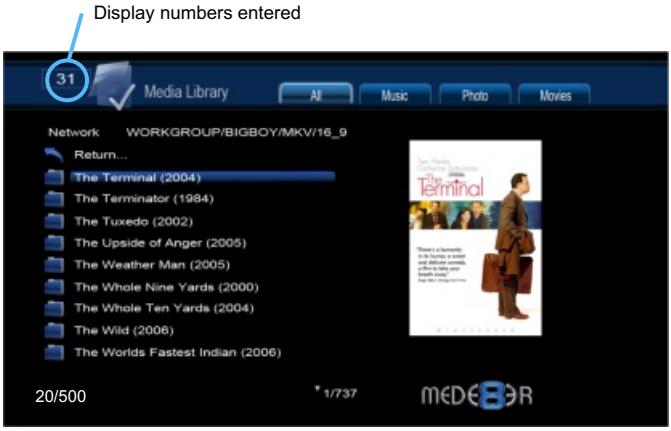

Enter the file or folder number you want to jump to. The number you enter will be displayed on the top left of the screen.

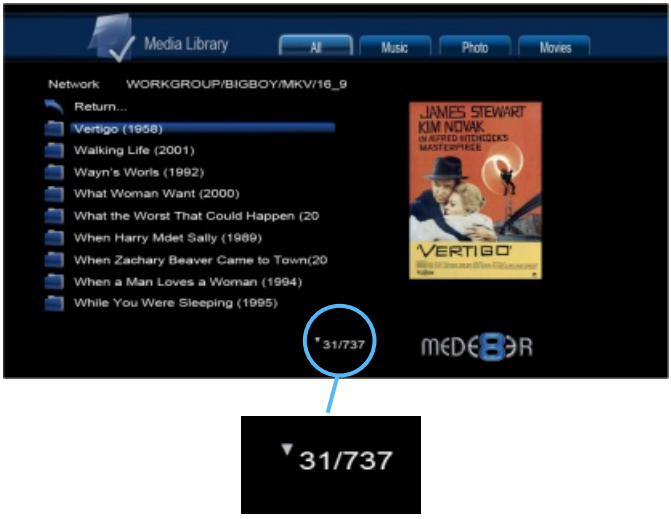

Enter File or Folder Number

After a brief pause the Mede8er will jump to the file or folder number you entered.

QUICK PLAYLIST FUNCTION



You can make quick Playlist on the fly while you are in Media Library view. To make a Music playlist you must select the “MUSIC” tab on the top right of the screen.

Focus on the file you want to add to the Playlist and press the Select button on the remote. A yellow tick will appear next to the file selected. To remove a selected file just focus on the file and press the Select button again. Repeat the above to add more files. Once you have completed ticking the required files press the Confirm button to add the files to the Playlist. In the Playlist view select the “MUSIC” tab and you can use the same procedure to remove any files from the Playlist.

You cannot make a quick Playlist from an external drive or network source.

Select Confirm



Music Playlist Button

You can easily start the music playlist at any time by simply pressing the “Music” button on the remote.

MAKING MULTIPLE M3U PLAYLIST’S

The Mede8er supports m3u playlist files that can be easily generated when the unit is connected to your PC via USB or Samba Network. You can use any 3rd party programs to make your custom playlist’s and we recommend Playlist Creator 3.6.2 as it is free and works well. In the case of Playlist Creator 3.6.2 you must make the following changed under settings - change “Saving Playlist Entries” to Relative. The m3u playlists will work on the internal Hard Drive, USB Drive or Network Share NOTE: The Playlist file ie xxx.m3u must be saved to any folder on the same drive as the music source files. The xxx.m3u will not work if you save it to the root directory of a Hard Drive. We suggest you make a “PLAYLIST” folder and save all you playlists in this folder.Playlist Creator 3.6.2 can be downloaded free of charge from http://www.oddgravity.com

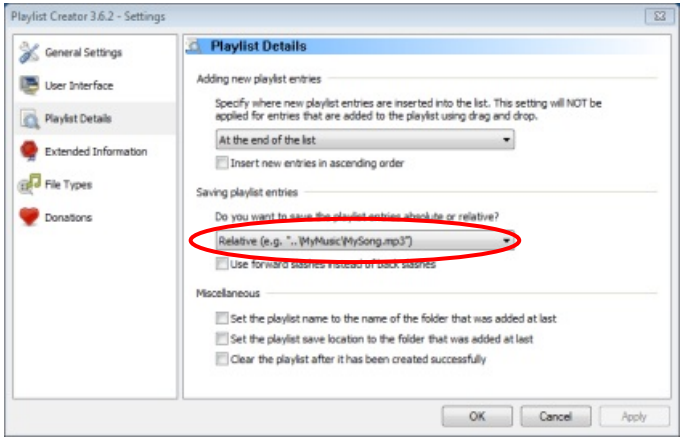
Playlist Creator 3.6.2 - Settings
General Settings
User Interface
Playlist Details
Extended Information
File Types
Donations
Playlist Details
Adding new playlist entries
Specify where new playlist entries are inserted into the list. This setting will NOT be applied for entries that are added to the playlist using drag and drop.
At the end of the list
Insert new entries in ascending order
Saving playlist entries
Relative (e.g. "..\MyMusic\MySong.mp3")
Miscellaneous
Set the playlist name to the name of the folder that was added at last
Set the playlist save location to the folder that was added at last
Clear the playlist after it has been created successfully
OK
Cancel
Apply

Saving Playlist Entries must be changed to “Relative”

TIME BAR JUMP

The Mede8er has the built in Time Bar Jump facility that allows you to quickly jump to a certain time in the video file you are viewing.

Press any numeric button on the Mede8er remote and the Time Bar will appear. the Time Bar graphically displays the current time play time in minutes and seconds and the total length of the video in minutes and seconds.

Display numbers entered

Enter the desired time you want to jump to on the remote controls numeric keypad and the Mede8er will display the time you entered on the top left of the screen and then automatically jump to this time in the video.

Enter Time
in Minutes

TIME BAR FF/RW

The Mede8er Time Bar is displayed during normal Fast Forward or Fast Rewind. Press Right or Left Navigation buttons on the remote for video files (DVD files use the FF/RW buttons) The Time Bar will appear and show you the current time in the video and the total length of the video in minutes. The Time Bar will dynamically update the current position in minutes as you Fast Forward or Fast Rewind. To stop Fast Forward or Fast Rewind press the enter button (Play button for DVD files).

Press any numeric button on the Mede8er remote and the Time Bar will appear. the Time Bar graphically displays the current time play time in minutes and the total length of the video in minutes.

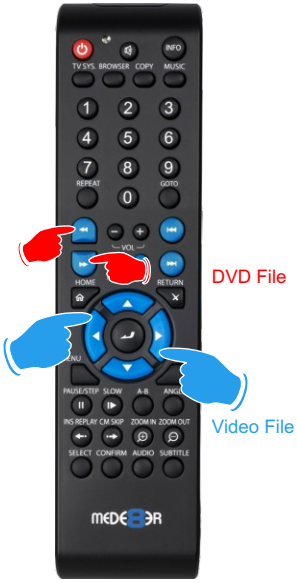

FF or RW

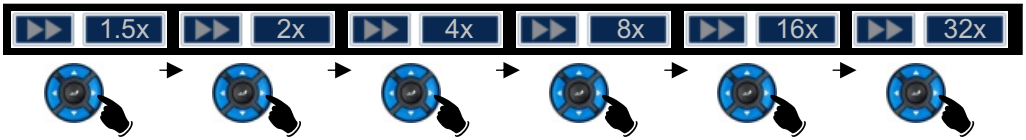

To change the Fast Forward speed just press the Right Nav Button and it will advance to the next higher speed. To change to a slower speed press the Left Nav button. For DVD files use the FF/FRW buttons.

VIDEO GOTO

Press the GOTO on the remote and the GOTO screen will open on the top centre of the screen. Press The GOTO screen allows you to change Time, Title, and Chapter. Press the Up or Down Navigation button to change the value or enter the numeric values on the remote. Press Enter once you have made your selection. To remove the screen press GOTO again or press the Return button.

Enter Time in Minutes



Time

Title

Chapter

SCREEN CALIBRATION

For more accurate Zoom functionality we suggest you calibrate your TV screen. Go to System Setup then Video and select Screen Size.

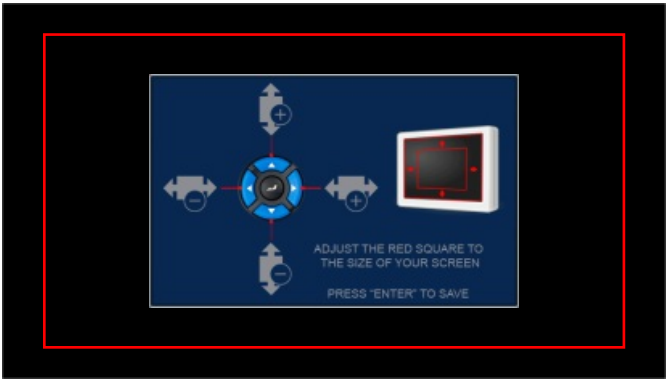

Press Enter to save

Using the left, right, up and down navigation buttons you can adjust the red rectangle to fit the outer frame of your TV screen. You can then do a fine adjustment to move the red rectangle so that is just not visable.

ZOOM

The Mede8er is equipped advanced zoom functionality and once your screen is calibrated you can zoom intuitively to either WIDTH or HEIGHT or XY of the video.

Zoom in/out

Zoom To Height - This zoom function is designed for full screen viewing of ultra wide screen aspect videos on a 16:9 TV.

Zoom To Width - This zoom function is designed for full screen viewing of older 4:3 aspect videos on a 16:9 TV.

Zoom XY - The Zoom XY allows you to stretch the picture horizontally and vertically independent of each other. This zoom function is designed to correct videos encoded with the wrong aspect ratio. You can also use the Zoom XY to zoom to any zoom preference you may have. Once you have selected your X and Y percentage press the ENTER button on the remote to store the settings. To re-adjust the Zoom XY you need to exit and then select Zoom XY again.

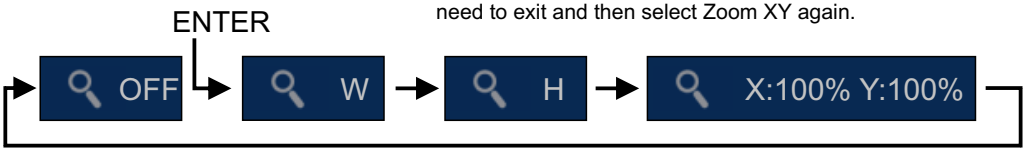

SUBTITLES

Mede8er supports various types of subtitle files. Subtitles can be set to default “on” or “off” in the Setup Menu under Misc. If the subtitle is embedded into the video file it will automatically be available on the Subtitle Dialogue Screen. External Subtitles must be placed into the same folder as the video file and must be named to be exactly the same name as the video file eg

Cloudy.With.A.Chance.Of.Meatballs.2009.720p.BluRay.HebDub.x264-WiKi.mkv
Cloudy.With.A.Chance.Of.Meatballs.2009.720p.BluRay.HebDub.x264-WiKi.srt

To access the Subtitle screen press the Subtitle button on the remote during video play.

sub	Subtitle on/off & selection
T	Text Encoding
AA	Text Size
A	Text Position
	Text Colour
	Text Sync

PLASMA MODE / VIDEO SCREEN TRANSPARENCY

The Plasma Mode has been designed for use with Plasma TV’s that are susceptible to still image “burn in”. The Plasma control will change the transparency level of the GUI screens and will not have any effect on the screens during Video Play. The Video Screen Transparency controls the transparency level of all video menus during Video Play. You have a choice of settings Off, Low or High.

AUTOPLAY

Mede8er allows for automated seamless folder play when the Mede8er is switched on. The autoplay facility is very useful and can turn the Mede8er into a very effective low cost Digital Signage Solution.

Autoplay Function

The Autoplay files can be stored on SD Card, USB Drive, or Local HDD. **1.** Create a folder in the root of the drive named “Autoplay” (Case Sensitive) **2.** Put either **Video** OR **Audio** files into this folder **3.** If you require the files to play in order name them as foll 01name - 02name - 03name - 04name - 05name - 06name - 07name - 08name - 09name - 10name - 11name up

Autoplay Operation

On power up the Mede8er will look for the “autoplay” folder and if found it will automatically play the contents of the “autoplay” folder. The contents will be played with the “Repeat All” as default. If a USB Drive is plugged into the Mede8er it will auto scan for the “Autoplay” folder and if found it will start the Autoplay function.

FILE MANAGER

Select File Manager from the home page or the “Copy” button on the remote and the File Manager screen will load. If you have selected “Pin Protection” in the Setup menu you will be prompted to enter your PIN Code. Now select the source option you require to copy or move files or folders from. After selecting the Source the focus will automatically change to the Destination window. Now select the destination option you require to Copy or Move files to.

The focus will now change back to your Source drive and you can now navigate to the files or folders you want to move or copy. Select the files or folders by pressing the SELECT button on the remote control and a yellow tick will appear next to the file or folder (multiple files can be selected). To de-select just press the SELECT button. Once you have completed selecting the files or folders you want to copy or move press the right navigation button.

Now you can navigate the destination option you selected earlier. You can choose to copy or transfer to an existing folder or make a new folder. If you choose “new folder” then a keyboard will open on-screen allowing you to type the new folders name. Now navigate to the new folders name and press the right arrow navigation button on the remote.

A screen will appear asking if you want to Move or Copy the files or folders. Once you select your option a file transfer screen will open showing you the file transfer progress.

Press SELECT to select a file or folder

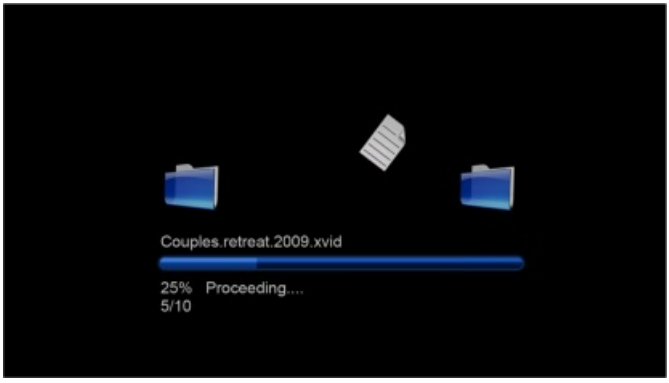

FILE MANAGER DETAIL

1 Select Source

Press ENTER

2 Select Destination

Press ENTER

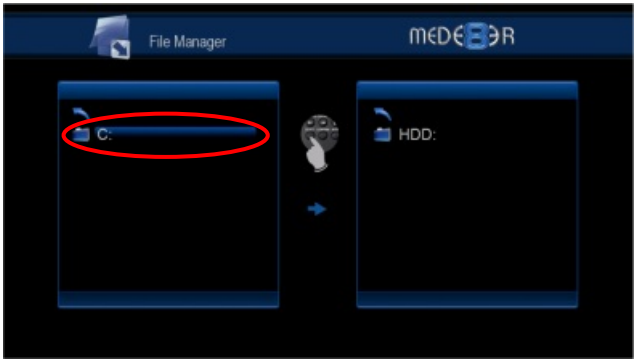

3 Navigate the SOURCE to the files you want to copy

4 Select the files by pressing the SELECT button on the remote.



FILE MANAGER DETAIL CONTINUED

5 Press Right Navigation Button

6 If you require a new folder select “New Directory” and type the folder name on the onscreen keyboard then select OK.

7 Select the Folder you want to copy to

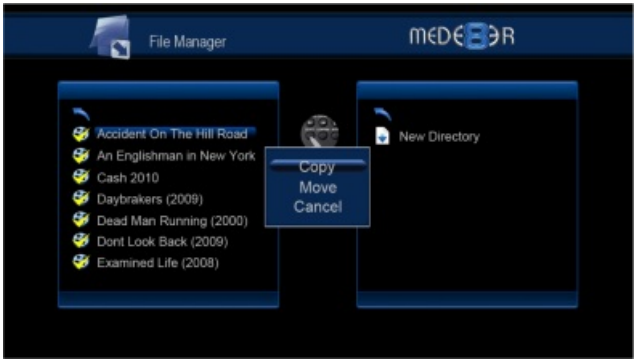

8 Press Right Navigation Button

Select Copy or Move

INTERNET RADIO

The Mede8er has a built in Internet Radio that allows you to listen to live Shoutcast radio stations on your TV or Home Theatre System. The Mede8er must be connected to the Internet in order to use the Internet Radio function. Choose the Station icon and a Station screen will open with a list of available stations. You can view the next page by pressing the right navigation arrow on your remote control and view the previous pages by pressing the left navigation on your remote control.

To listen to a station press the Enter button on the remote and the Channel screen will load. Choose a Channel and the station and content information will appear on the right panel and the station will play.

Press the “Menu” or “Select” button on the remote control to save a Station to Favorites (Channels cannot be saved). To delete a station in the Favorite folder -- Open Favorites and select the station and press the “Menu” or “Select” button on the remote. You can search stations by Genre eg Top 25 Streams, Alternative, Classical, Comedy, Country etc etc. You can also search for a radio station via the built-in search facility.

Press SELECT to save Station to Favorites

Previous Page

Next Page

WARNING - Streaming Live Internet Radio uses bandwidth so use it with caution.

Internet Radio
MEDE8ER
FM - 24h Techno, Dance, Trance, House and More - 128
2 .977 The Hitz Channel - 977MUSIC.COM - The ...
3 #MUSIK.MAIN - WWW.RAUTEMUSIK.FM - 24H T...
4 #MUSIK.CLUB - WWW.RAUTEMUSIK.FM - 24H M...
5 top 100 station - Germanys No.1 Web Hit Statio...
6 DJ_MeLeK iLe G?NaYD?N :))
7 ENJOYSTATION.NET France Vichy! Paris, Canad...
8 -=[:: HOT 108 JAMZ ::]=- #1 FOR HIP HOP - 12...
9 Absolutely Smooth Jazz - S K Y . F M - the worl...
Genre: [Techno Electronic Dance]
Listeners/Max:8873/16300
Bitrate:128Kbps
Type:MP3
Press LEFT/RIGHT to change pages
PAGE 1 / 1580

NFS (Network File System)

Mede8er by default uses Samba to stream content on a local network and this should be more than sufficient for most users. NFS generally provides better throughput speeds when streaming on a local network. If you are streaming from a Windows PC you will require a NFS client to be running on the host PC. The Mede8er has been tested and verified with HaneWin but other NFS Servers should work equally as well. You can download HaneWin at http://www.hanewin.net/nfs-e.htm

Setting up NFS shortcuts on the Mede8er

Select the NFS tab on the Media Library screen. The NFS shortcut screen will open. Now press the MENU button on the Mede8er remote and a dialogue screen will open. Fill in the IP Address of the Host PC and the Share Name.

NOTE: The share must be inputted as an “absolute path” ie C/YOURSHARENAME

IMPORTANT NOTE:
You may have to enable “Flow Control” or disable “Jumbo Frames” on your Network Card settings if you are using NFS with a 1GB switch on your network.

export example of a folder
l:\dvd -public -readonly -name:dvd

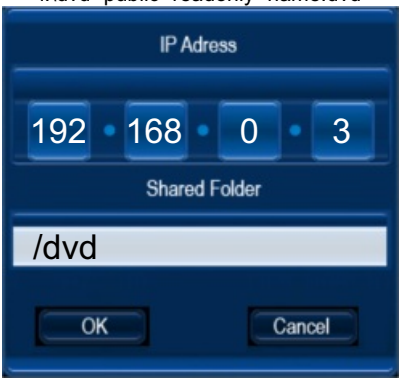

Recommended Settings HaneWIN
UDP NFS Server Threads : 32
Max NFS tranfer size : 32768

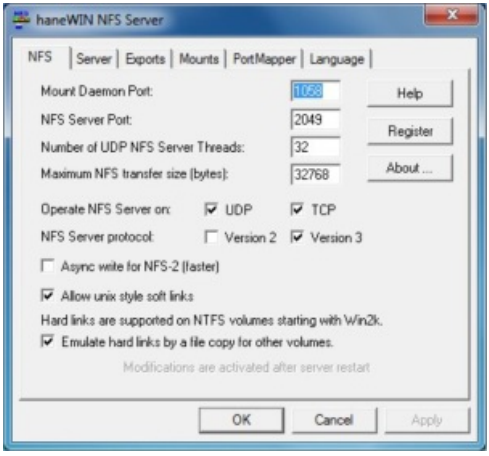

export example complete drive
e:\ -public -readonly -name:e

ICON TABLE

MENU		Return
		Rename
		Delete
		Mark as watched
		Remove watched indicator
		Lock Folder
		Unlock Folder
INFO SCREEN		WiFi
		Audio Info
		Replay
		Local HDD
		SD Card
		Wire Network
		Info
		Zoom
		USB
		USB DVD
GOTO		Time Jump
		Next / Previous Chapter
		Select Title
SUBTITLE		Subtitle on/off & selection
		Text Encoding
		Text Size
		Text Position
		Text Colour
		Text Sync

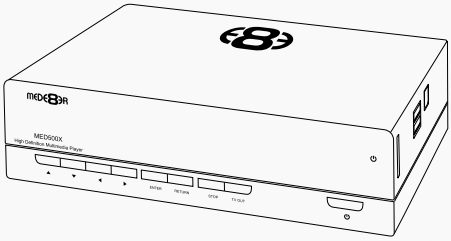

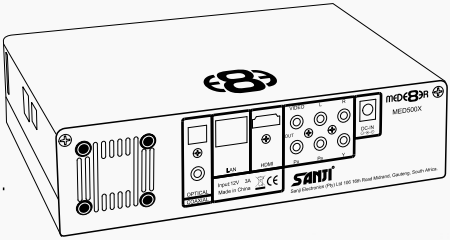

High Definition Multimedia Player

www.mede8erforum.com

www.mede8er.com www.mede8er.eu

For more information or support please visit
www.mede8er.eu/support/
or call +31(0)10-7142861 during business hours.

Sanji Electronics (Pty) Ltd 106 16th Rd Midrand, Gauteng, South Africa.
Tel: 2711 2667500 Fax: 2711 2667501 Email sales@mede8er.com